


SmarTEC TECHNOLOGY

Balancer board Specifications For 3.2V LiFepo4 Battery Pack

Model: PCM-B01S10-394 (1S)

No	Test Item	Criterion	
1	voltage	Balanced start voltage	3.60±0.03V
		Balanced start detection delay time	0.96S—1.4S
		Balanced off voltage	3.50±0.05V
2	Current	balancing current	0.7A±0.05A

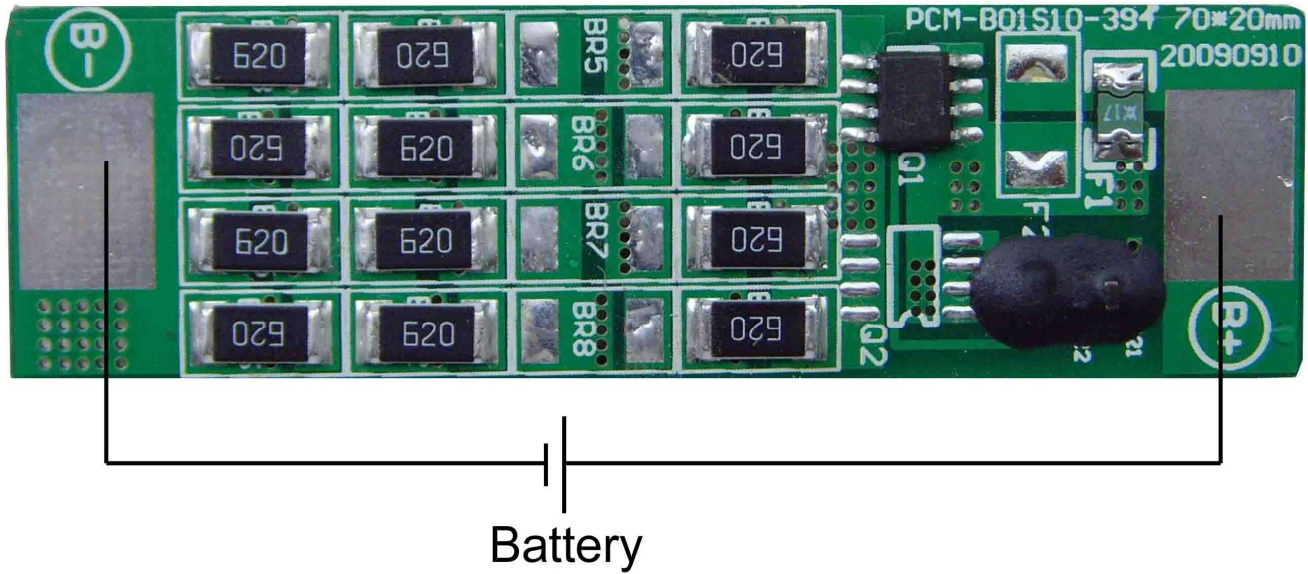

注：因均衡电流较大，建议使用线芯不小于18#线进行连接。

As the balancing current is too big, advise connection use min. 18# wire